

V1

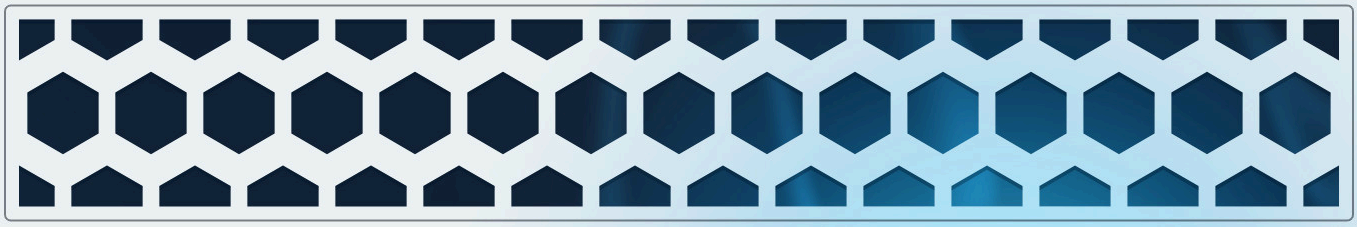

NYNA

Brand guidelines.

How NYNA looks, speaks and moves: the wordmark, the colours, the type, the board and its parts.

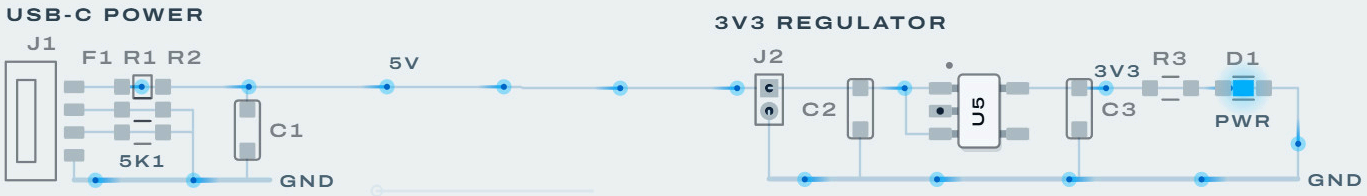

The brand is a circuit board.

NYNA builds websites, networks and hardware. The identity comes from the hardware: every page is a board, with copper routed around the words, parts placed on pads, and the whole thing lit from behind.

The board is the page.

Content sits on the solder mask. Copper runs around it and never behind anything that has to be read.

White first, black second.

White solder mask is the home colour. Black is the alternative, for dark mode and for video.

Blue is light.

NYNA blue appears only where something is lit: an LED, a charge on a trace, the lamp behind the board. On an HDR screen it is brighter than white.

Real, not decorative.


The circuits are real and they run. References follow the conventions of a real board: U1, R4, TP2.

Calm, physical motion.

Things move because current flows or because the board is handled. Nothing bounces or spins for effect.

One voice.

Plain and precise. NYNA speaks as a company: “NYNA” or “we”, never “I”.

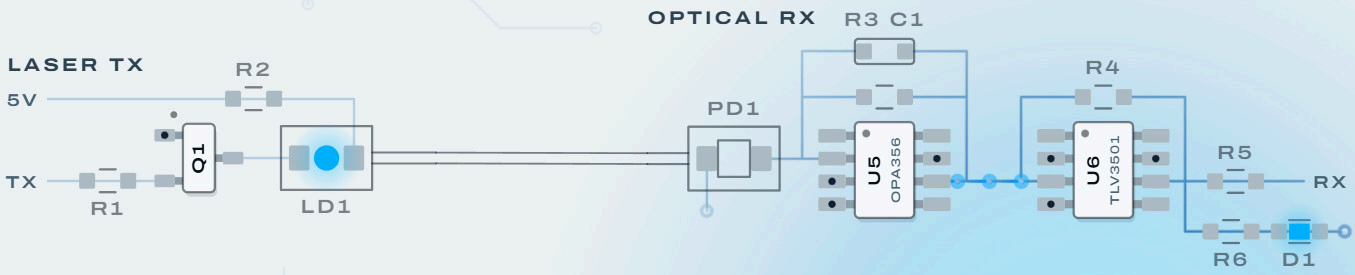

The wordmark.

Four letters in Unbounded Medium, tracked out by six percent. It is printed on the board like any other silkscreen: one colour, flat, no effects.



Clear space on every side equals x, the height of the N. Minimum width: 96 px on screen, 24 mm in print.

NYNA

#09111B on #ECF2F4

NYNA

#F2F2F2 on #0E1824

- Use the wordmark alone. There is no symbol and no strapline locked to it.
- Do not stretch it, tilt it, add a shadow or set it in another typeface.
- Do not colour it blue. Blue is light, and the wordmark is ink.
- The upright lockup, beside this list, is the one outlined form: the letters are cut out and the light shows through them. Use it large, on the board, with the line that runs its full height.

NYNA

IT / WEB / HARDWARE / LONDON

White solder mask.

The home palette: a cool white board, blue-black silkscreen ink and tin pads, on a deep navy bench. Every colour is a material, and every one carries a little of the blue.

Mask
#ECF2F4

The board. Page background.

Silk
#09111B

Ink: headlines, lines, solid keys.

Ink 2
#2F4351

Body text.

Ink 3
#4B6474

Labels and captions. 5:1 on mask.

Pad
#ADBBC3

Tin finish: pads, pins, vias.

Bench
#122236

What the board sits on, seen through its holes.

LIGHT

Glow
#1FC0FF

NYNA blue: the lamp, charges and LED halo.

Accent
#008EDB

Light on white: links and focus.

LED
#00B0FC

A lit LED on the white board.

- Blue is never a background, and never the colour of body text.
- Copper under the mask stays quiet: #DDE9EF for routing, #B7D1E1 for a circuit's own traces.
- Errors are the one other colour: #AD0703.
- Photographs and renders are shown a little richer than they were taken: saturation 1.22.

Black solder mask.

The alternative: the same board in a navy black, with white ink. Use it for dark mode, for video and wherever the light should carry the picture.

Mask
#0E1824

The board. Page background.

Silk
#F2F2F2

Ink: headlines, lines, solid keys.

Ink 2
#ACBECE

Body text.

Ink 3
#8399AD

Labels and captions.

Pad
#758795

Tin finish: pads, pins, vias.

Bench
#05090F

What the board sits on, seen through its holes.

LIGHT

Glow
#1FC0FF

NYNA blue: the lamp, charges, links and focus.

LED
#AEE8FF

A lit LED on the black board.

Error
#FF8F85

The one other colour.

- White is the default. Choose black on purpose, not out of habit.
- Do not mix white and black boards in one layout, except to show the switch between them.
- Copper under the black mask: #142030 for routing, #1F3751 for a circuit's own traces.
- In HDR, light is brighter than the page: up to two stops over white for an LED or lit copper, and one for the glow of the white board.

Type.

Two families and a wordmark. Archivo carries everything that is read. Its wide cut makes the headlines and the labels printed on the board.

WORDMARK

NYNA

Unbounded Medium. The wordmark, and nothing else.

HEADLINES, PART NAMES, LABELS

We design the board, not just the code.

Archivo Wide, 570 to 600. Headlines are tracked in by 3.5 percent on a line height of 1.02.

U1 TP2 J1 R10-R17 3V3 433MHZ

Labels are 600, uppercase, tracked out by 14 percent, at 9 to 11 px.

BODY


From schematic capture to a finished, fabricated board, NYNA designs custom PCBs for embedded products, prototypes and one-off builds.

Archivo, 400 to 600. 18 px on a line height of 1.55 on the web. Never below 12 px.

- Sentence case. A headline is a sentence and ends with a full stop.
- No italics, no third typeface, no all-capitals except the labels printed on the board.
- The fonts are hosted with the site at fixed widths (archivo, archivo-wide, unbounded-500). Never stretch a font to get the wide cut.

The board and its parts.

Four things make a layout a NYNA board. Use them the way a real board would.

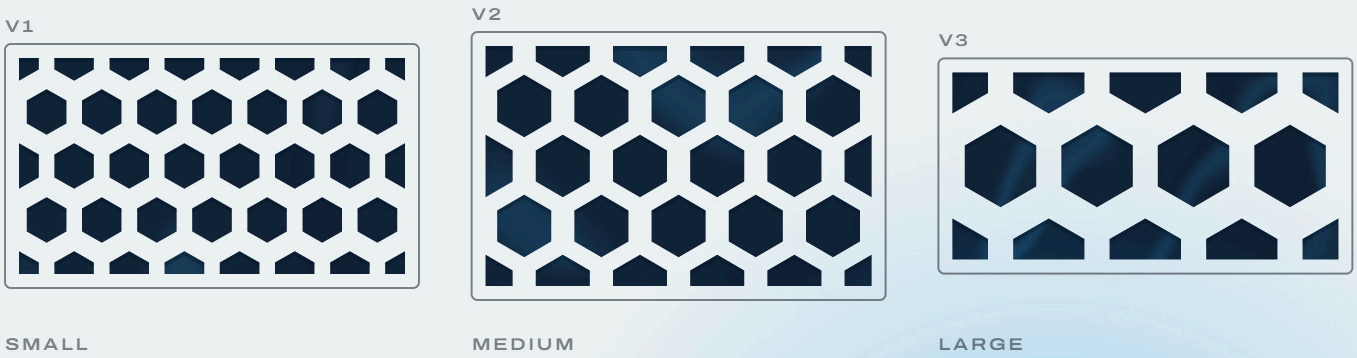



Honeycomb.

Holes cut through the board in a hexagonal lattice, squared off so each field is a clean rectangle, in three cell sizes. Through them you see the bench and the light behind it.

Copper.

Traces run on a 12 px grid, turn at 45 degrees and end in vias. They route around all content: the layout decides the copper, never the other way round.

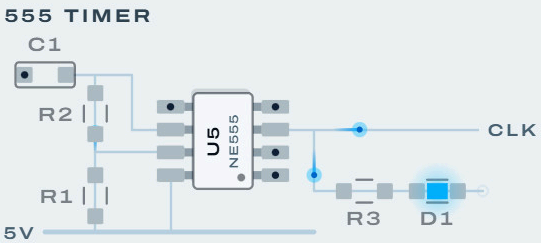

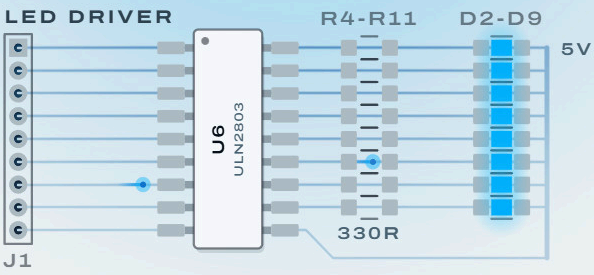

Circuits.

Real ones, named on the board: a 555 timer, an LED driver, an optical link. Signal flows left to right, and an LED lights only when its circuit would light it.

Silkscreen.

Every part has a reference, as on a real board: U for chips, then R, C, D and J, TP for test points, V for vents. A frame marks where a part or a field sits.

Components.

Controls are parts on the board. Each one shows its state with an LED, and moves the way the real part would.

KEYS

Start a project

View our work

A solid key cap for the one main action, an outline for the rest. A cap travels down when pressed.

LATCHING KEYS

U1
Website
Design & build

U2
Computers
Repair & setup

For choices. A chosen key stays down, turns to ink and lights its LED.

CONNECTOR
J1



EMAIL	info@nyna.co.uk
PHONE	+44 7384 578916
WEB	nyna.co.uk

For ways in and out: contact details, links. The pin you point at is probed.

LED LIST

- Schematic and layout
- Embedded firmware
- Prototype to product

Bullets are LEDs. They are dark until their line is read, then lit.

TP1 TP2 TP3 TP4

Test points

For a short sequence: steps or pillars, joined by one trace.

Packages

A service or a product is a chip: a body, a reference, pins on pads.

Fields


A field has an LED by its label. It lights when the field is ready.

Corners


6 px on keys and fields, 18 px on a board. Never a pill.

Motion.


Things move for a reason: current flows, a part is pressed, the board is turned. Movement is calm, and it settles.

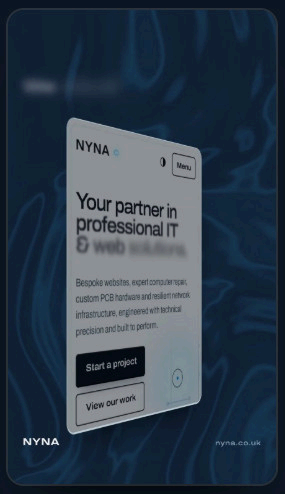


The board turns over to change the subject.

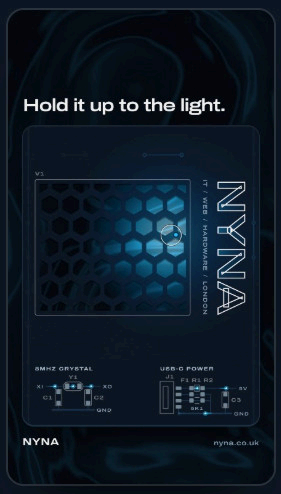

The light follows the hand.

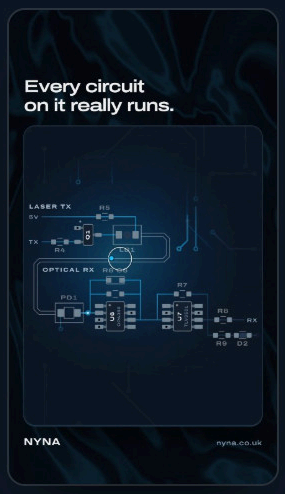

Current runs left to right.

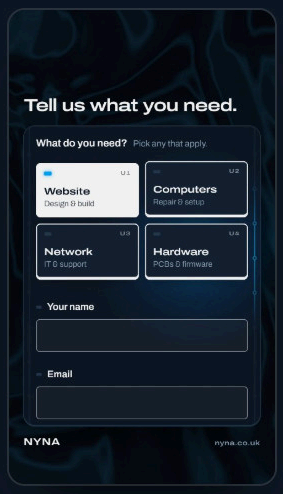

A press latches, and an LED answers.

Arrive	Out of focus to sharp: opacity, and blur from 14 px.	0.9 s
Words	A headline resolves word by word.	55 ms apart
Current	Charges run along traces, in the direction of the signal.	26 to 150 px/s
Press	A key cap travels 2 to 3 px and comes back, or latches.	80 to 160 ms
Switch	A new solder mask spreads out from the switch that was pressed.	620 ms
Turn	In video, the board turns over to show something new.	0.95 s
Push	In video, one scene pushes the last out upwards, blurred along its travel.	0.5 s

- Arrivals ease out on cubic-bezier(.16, 1, .3, 1). Moves between two rests ease in and out.
- Nothing bounces, spins or loops for decoration. If reduced motion is asked for, everything settles at once.
- Video is 60 frames a second and upright, 9 by 16: the board floats over the bench, with one headline above it in Archivo Wide.
- A post that moves begins and ends on its still, so it loops.

Voice.

Plain, precise and calm. NYNA explains engineering in ordinary words and lets the work carry the weight.

- Speak as the company: “NYNA” or “we”. Never “I”.
- Sentence case. No exclamation marks.
- No dashes as punctuation: use a comma or a colon.
- Name the real part and the real number: a 650 nm laser, 128 kbps, one working day.

SAY

We design the board, not just the code.

Quotes are free. Replies within one working day.

Every circuit on it really runs.

AVOID

~~Synergistic, next-generation solutions.~~

~~We’re passionate about technology!~~

~~World-class, cutting-edge, best in class.~~

Contact.

J1

EMAIL info@nyna.co.uk

PHONE +44 7384 578916

WEB nyna.co.uk

OFFICE Office 1.42, Building 2, Croxley Business Park, WD18 8YA

THE KIT

Ready-made graphics live in brand/social/backlit: a LinkedIn banner, posts and stories at 4K with an HDR light layer, and video at 60 frames a second, with suggested captions.

They are drawn by the site itself, so they always match it. Regenerate them with _social_gen.mjs, _social_motion.mjs and _social_video.mjs.

V1

